

# Machine Protection Door

ASSA ABLOY RP300 / RP300 Wide / RP300 USD

**ASSA ABLOY**  
Entrance Systems

Experience a safer  
and more open world





### HIGH SPEED

Rapid opening and closing ensures short cycle time.



### HIGH RELIABILITY

High reliability and low service even after years of high numbers of cycles.

### HIGH SAFETY

Safety contact edge or touchless safety edge. Safety limit switches according to PLe and SIL3.

# Machine Protection Door ASSA ABLOY RP300 / RP300 Wide / RP300 USD

## Advantages of the door

- Rapid opening and closing ensures short cycle times up to 5 cycles per minute
- High reliability even after years of high numbers of cycles
- Safety limit switches according to EN ISO 13849-1 and EN 62061
- Doors conform to EN ISO 12100 and EN ISO 14119
- Versions conforming to various factory standards are possible
- Type tested machine protection door with fabric door blade

## Design

### Side Frames

The side frames are made of aluminum profiles. The front cover side frame can easily be removed and allows easy access for inspection and maintenance.

### Windows

For process monitoring when the door is closed, various window variants are available. For all other variants of curtains, optional horizontal or vertical windows are integrated in the door curtain. Also anti-UV windows conform to EN 1598.

### Drive Unit

Gear motor with safety gear box including catching device, mounted on the right or left side.

### Control System

The door is equipped with a frequency converter control system MCC. The powerful MCC frequency converter control system with Vectoring of the drive unit, connected to the wide range of functions, enables the complex application of the door.

Upon request the door can also be delivered without a control system (not Upside Down). Extension box: Space saving extension box for MCC allows mounting of interface card or safety monitoring module for safety limit switches.

### Safety Limit Switch integrated in Side Frame

For the indication "door safely closed", safety limit switches are integrated in the side frame. Optional evaluation by safety systems of the machine (version without safety monitoring module). Due to the use of safety limit switches, machine protection doors cannot be equipped with a knock-out mechanism.

### Model ASSA ABLOY RP300 USD

The new ASSA ABLOY RP300 USD (Upside Down) machine protection door is designed so that you can integrate it into your production area where bigger components and machinery must be arranged vertically.

### CE Guidelines

This door is designed according to the regulations of the Workplace Directive of the UVV as well as the harmonized CE Guidelines including the EN 13241-1 and 2006/42/EG.

### Safety Features

The bottom profile is monitored by an electrical safety contact edge. As an option, the door can be equipped with a pre-running photocell in combination with the control system MCC (Standard on Upside Down). A door line photocell also prevents the door from closing when objects are interfering.

### Integrated Cable Chain

Integrated cable chain guides cables for pre-running photocell or electrical safety contact edge inside the side frame.

### Indication of Risk

The security of the door is designed for normal use for vehicles in industrial environments corresponding to the harmonized CE-Guidelines. In addition, special environmental conditions may impact the type of door necessary. For clarification and details, please contact your local sales engineer.

### Door Curtain

From partially transparent PVC curtains with colored reinforcement stripes with a high degree of transparency to highly rigid RollTex® and NomaTex®. All door curtains are silicon-free. Side-mounted wind tabs reduce inward bending of the door blade. RollTex® according to TRAV (technical rules for use of anti-fall guard vitrification).


	RP300	RP300 wide	RP300 USD (Color code according to RAL color card)	PVC with colored fabric reinforcement strips	PVC with colored fabric reinforcement strips silicone-free	RollTex® Plus TRAV**	RollTex® Original TRAV**	NomaTex®
Windows	-	-	-	-	-	•	•	-
Vision panels	-	-	-	-	-	-	-	•
Blue	• 5002	• 5010	✓ 5002	• 5002	• A 5005*			
Red		• 3002			• 3000			
Orange		• 2011	• 2009	• 2009	• A 2009*			
Grey	• 7035	• 7037	• 7001	• 7001	• A 7038			
Yellow		• 1021			• 1023			
Green	• 6018							
Beige	• 1014							
White	• 9016	• 9010						
Black		• 9005						

RP300 USD only „RollTex® Original“ possible

\*\* = TRAV-Certificate only available with RP300

A = Antistatic properties \* = plain surface on side of top roll

# Technical Data ASSA ABLOY RP300 / RP300 Wide / RP300 USD

TECHNICAL DATA	ASSA ABLOY RP300	ASSA ABLOY RP300 Wide	ASSA ABLOY RP300 USD
Application	Interior door / Machine Protection Door	Interior door / Machine Protection Door	Interior door / Machine Protection Door
Door dimensions (mm) (DW min./max.) (DH min./max.)	750 / 4000 mm 750 / 3500 mm	750 / 6000 mm 750 / 5000 mm	1000 / 5500 mm 1000 / 3500 mm
max. area	14 m <sup>2</sup>	30 m <sup>2</sup>	14 m <sup>2</sup>
Opening direction	vertical	vertical	vertical
Wind resistance (EN 12424)	class 1 (max. 11 m <sup>2</sup> )	class 1 up to DW ≤ 5600 mm	class 1
Noise emission	< 70 dB A	< 70 dB A	< 70 dB A
Temperature range max. (Extended on request) <sup>3)</sup>	+10°C – +45°C (0 up to +60°C) <sup>1)</sup>	+10°C – +45°C (0 up to +60°C) <sup>1)</sup>	+10°C – +45°C (0 up to +60°C) <sup>1)</sup>
<b>Surface material</b>			
Side frame	✓ Anodized aluminum	✓ Anodized aluminum	✓ Anodized aluminum
Top roll cover	• Anodized aluminum	• Anodized aluminum	✓ Anodized aluminum
Bottom profile	✓ Anodized aluminum	✓ Anodized aluminum	✓ Anodized aluminum
Motor cover	• Powder coated steel, RAL 9006	• Powder coated steel, RAL 9006	• Powder coated steel, RAL 9006
Extension side frame	–	–	250 – 500 mm (depending on doortype)
<b>Safety features</b>			
Electrical safety contact edge	✓	✓	–
Door line photocell	✓	✓	–
Pre-running photocell (Door line photocell as option)	•	•	✓
Flush bottom profile	•	–	–
Drop down protection in drive unit	✓	✓	–
Pre-running photocell <sup>2)</sup>	–	–	✓
Emergency egress	Crank handle	Crank handle	Crank handle
Counterbalance	–	–	Counterbalance
<b>Equipment</b>			
LED traffic light	•	•	•
Traffic light / Flashing alarm light	•	•	•
Suitable machine protection	✓	✓	✓
Safety limit switch in side frame	✓ 1 piece / • 2 piece	✓ 1 piece / • 2 piece	✓ 1 piece / • 2 piece
Window in sideframe, view on magnetic switch	•	•	•
<b>Drive unit</b>			
Motor power	0,75 kW	0,75 kW	0,75 kW
Chain drive	•	•	–
Gear heating	•	•	•
Control system	✓ MCC	✓ MCC	✓ MCC
<b>Control system</b>			
Open/Close max. (m/s) <sup>2)</sup>	• 2,4 / 1,3 2,4 / 1,75 (pre-running photocell)	• 1,7 / 1,0 1,7 / 1,1 (pre-running photocell)	✓ 2,2 / 1,5
Cycles per minute max. * exact number of cycles depending on application	5*	1,5*	5*
Separate display / control	•	•	•
Fuse protection by site	10 A (C-characteristic) (at 220/230V 16 A)	10 A (C-characteristic) (at 220/230V 16 A)	10 A (C-characteristic) (at 220/230V 16 A)
Control voltage	24 V DC	24 V DC	24 V DC
Protection	IP 55	IP 55	IP 55
Potential-free contacts	•	•	•
UL-Version 	•	•	•
<b>Network connection</b>			
MCC	3/(N)/PE/380/400/415/440/460/480V (+/-10%), 50/60Hz Other voltages on request.		
	UL-Version: 3L/(N)PE/208/220/230/460/480V; 60Hz		

- Option
- ✓ Standard
- \*) Specific number of cycles on request



## Safety limit switch

Optional: For easy check of the safety limit switch a transparent cover in the side frame is possible.



## Bottom profile

Optional: Edgeless bottom profile is flush to curtain.



## Motor position

Motor can be mounted right- or lefthand side. Motor position can be chosen in step of 45°. A chain drive is available as option in case of space limitations.

1) For doors of height < 2300 mm the use of top roll cover is required according to standard EN 13241-1.

2) Deviations possible depending on other properties

3) Depending on cycles/minute, door size and installation location



Example of use: door in assembly line

The demands in automated manufacturing processes are high and the smallest interruption or delay can break down the flow of production or endanger employees. Machine protection doors help manufacturers avoid both scenarios. The doors are integrated into the processes and open and close according to the production run. They enable the rapid change from complete isolation of the production step to free access to work piece and machine within seconds. It allows short cycle times and can be installed in machines, on production lines and railing systems within close proximity to the machine. Plus, they protect people in highly automated areas, making processes much safer.

#### Advantages of the ASSA ABLOY RP300/RP300 Wide/RP300 USD

- Service friendly: Two-pieced aluminum side frames offer easy access for inspection and maintenance
- Pre-running photocell: in combination with control system ASSA ABLOY MCC a pre-running photocell is available as option. It provides more comfort and higher closing speed
- Integrated cable chain: The cables of the electrical safety contact edge and pre-running photocell are guided in cable chains inside the side frame
- Pluggable cables in the cable chain
- Drive unit: A chain drive is available as option in case of space limitations

#### Connection with the machine

The in- and outputs of the door control unit MCC (potential 24 V DC) can be connected directly, to the machine. The in- and outputs of the door control unit MCC can be connected potentialfree with the machine. As standard the following signals are available:

- 2 potential-free safety contacts, when the door is closed (safety limit switch)
- 1 output or potential-free signal, when the door is open
- 1 output or potential-free signal when the door is closed
- 1 output or potential-free signal for faults








The ASSA ABLOY RP300 USD closes from bottom to top






Example of use: place a workpiece into the process



# General drawing ASSA ABLOY RP300

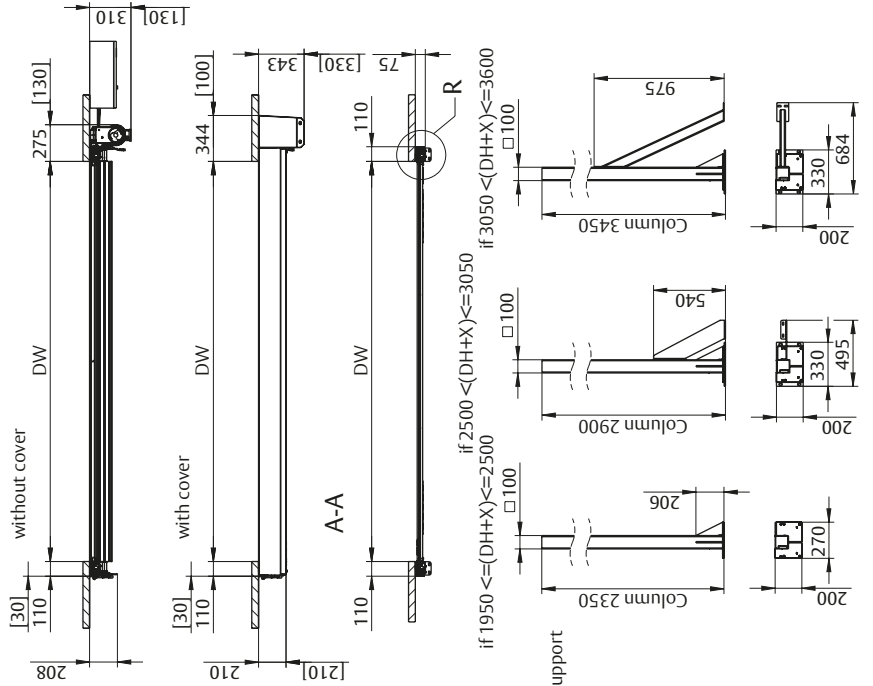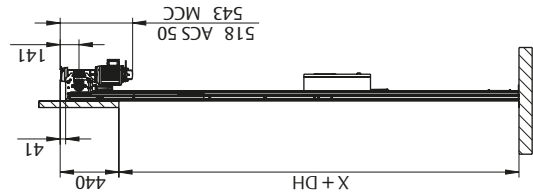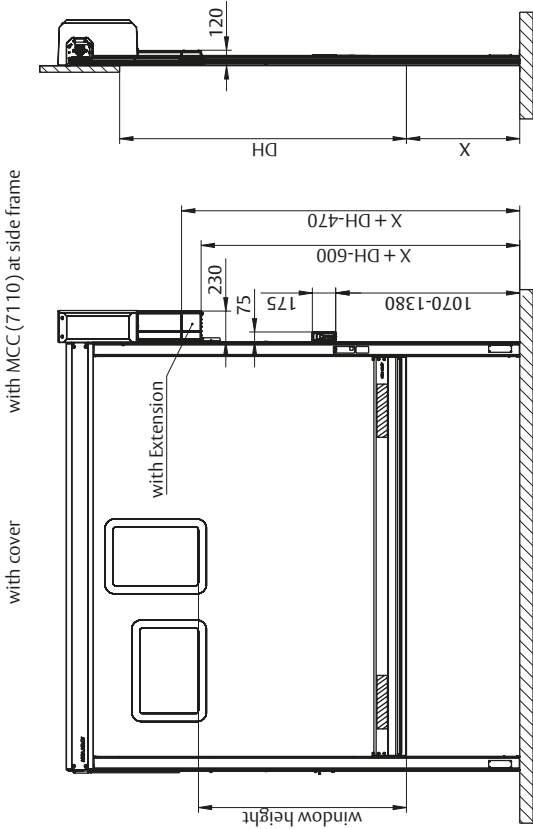

Chain drive




Vario drive



every 45°

every 45°

\*UL-drive unit




Not shown drive unit- and chain drive positions at request

Tolerance  $\pm 3$  mm (for all dimensions)  
Dimensions in [ ] = clearance for installation

9300R0001/8

# General drawing ASSA ABLOY RP300 Wide

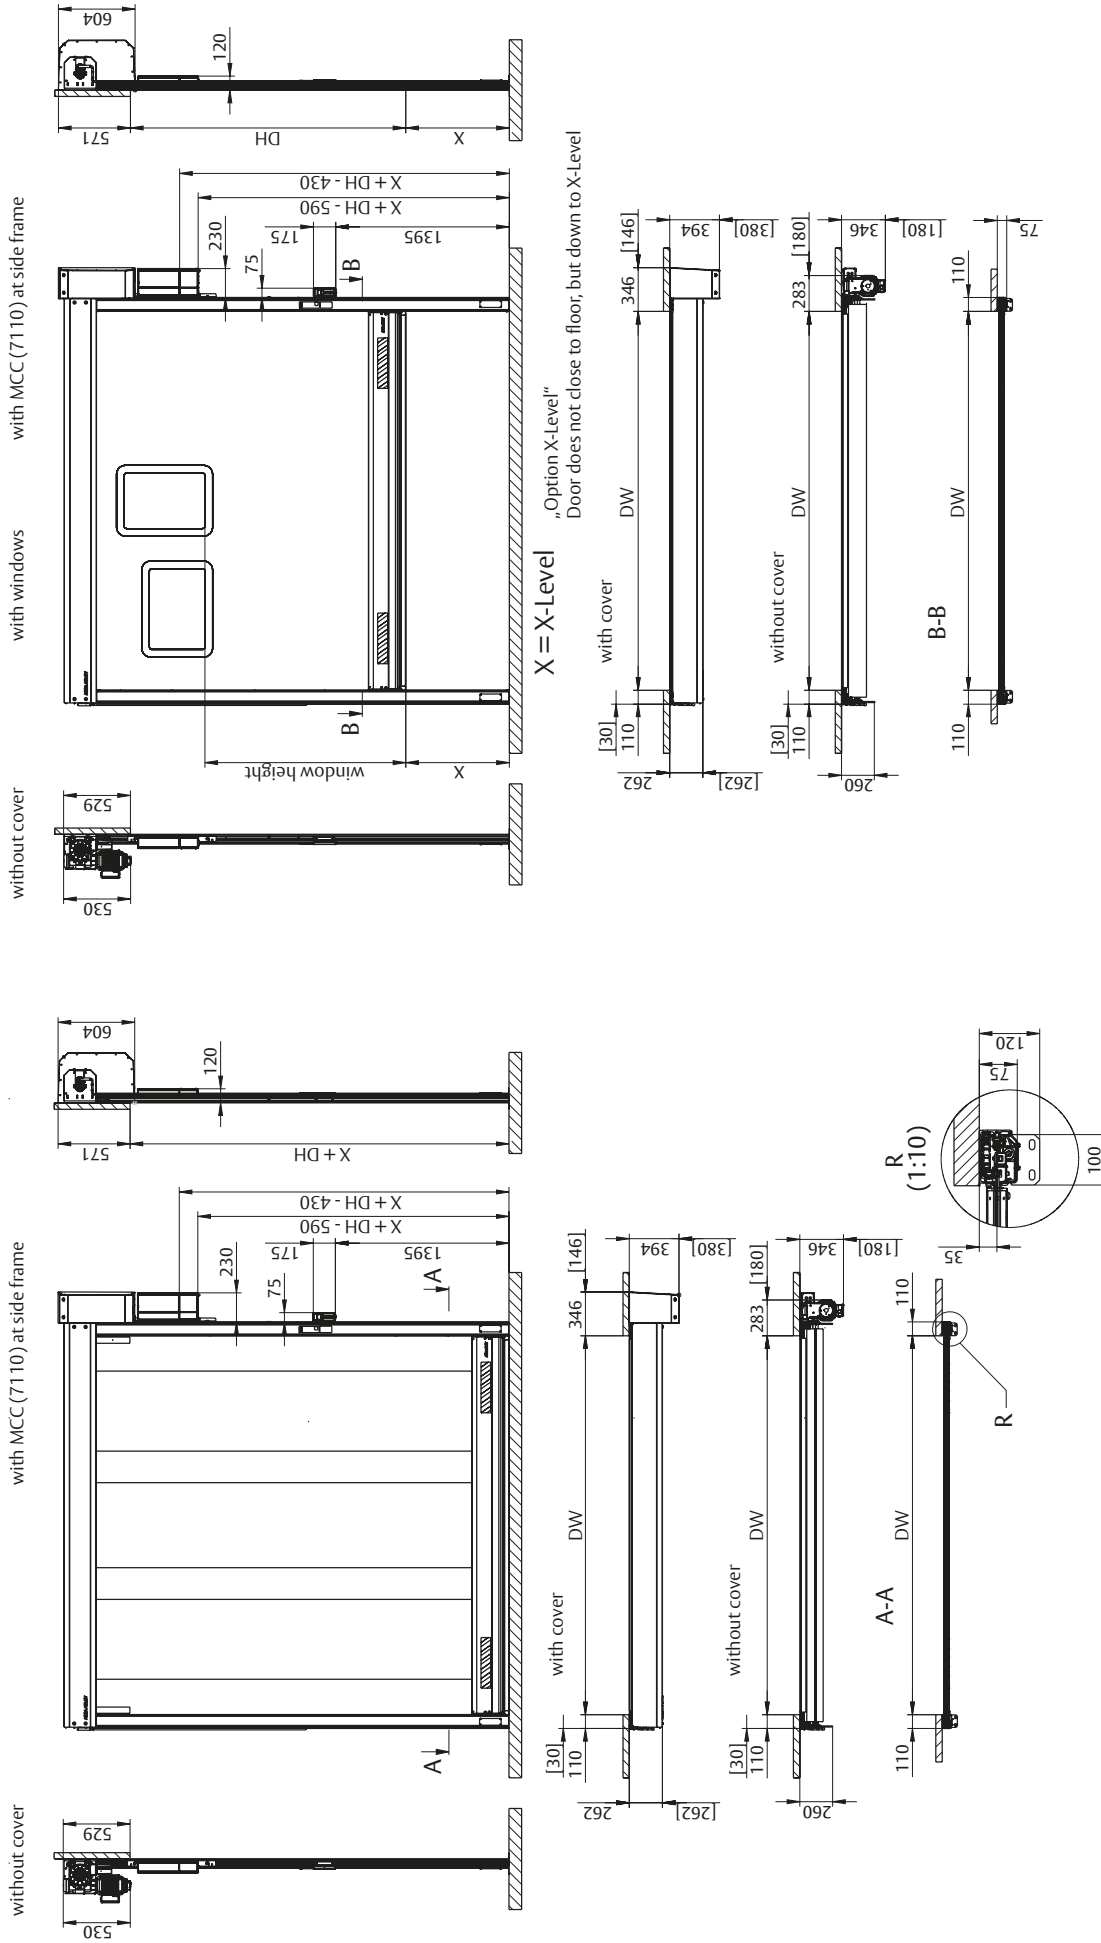


Available sizes		
	DW (B)	DH (H)
min. (mm)	750	750
max. (mm)	6000	5000
DW > 4000 or DH > 3500		

Control Unit		
	ACS 50	MCC (7110)
	300 x 400 x 210	220 x 380 x 100
Dimensions (W x H x D)	mm	220 x 340 x 100

Tolerance ± 3 mm (for all dimensions)
Dimensions in [ ] = clearance for installation


9300R0009/5

# General drawing ASSA ABLOY RP300 USD

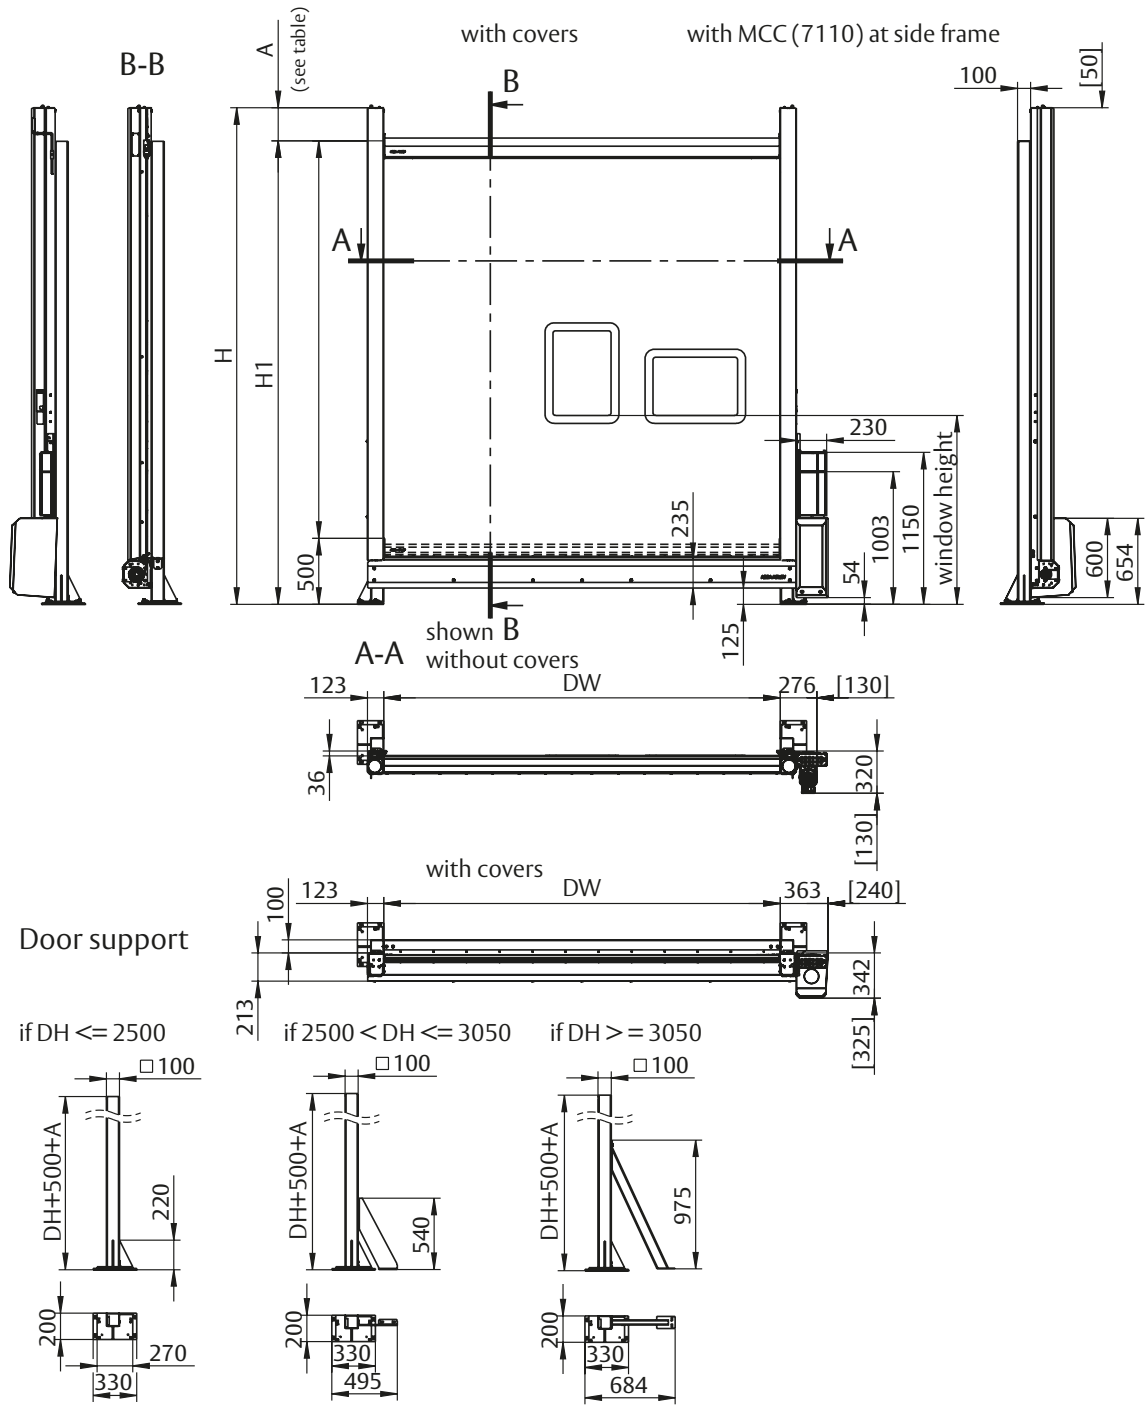


Door support


if  $DH \leq 2500$

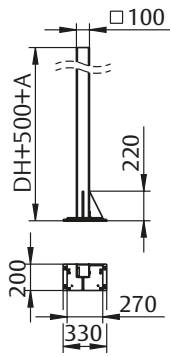

if  $2500 < DH \leq 3050$

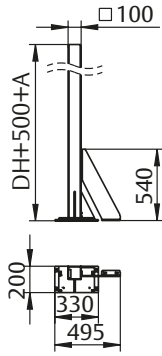

if  $DH \geq 3050$

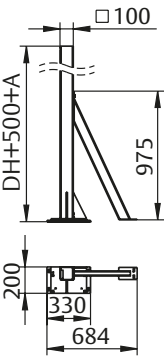

Height [m] to	1,0	1,5	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5
3,500	250									
3,250										
3,000										
2,750										
2,500										
2,000										
1,500										
1,375										
1,250										
1,125										
1,000						500				
Width [m] to	1,0	1,5	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5

Available sizes		
	DW	DH
min. (mm)	1000	1000
max. (mm)	5500	3500

Tolerance  $\pm 3$  mm (for all dimensions)

Dimensions in [ ] = clearance for installation



The ASSA ABLOY Group is the global leader in access solutions. Every day, we help billions of people to experience a more open world.

**ASSA ABLOY**  
Entrance Systems

ASSA ABLOY Entrance Systems provides solutions for efficient and safe flow of goods and people. Our offering includes a wide range of automated pedestrian, industrial and residential doors, loading dock equipment, perimeter fencing and service.



- ⊙ Production Location
- Sales Organisation
- Reseller

For subsidiary or representatives in your region visit:  
[assaabloyentrance.com](http://assaabloyentrance.com)

Follow us:



Please enter ASSA ABLOY Entrance in the channel's search field.